



# ET28 共模滤波器

## 产品特点

- ◎可以实现全自动绕线。
- ◎磁芯为闭合磁芯，漏磁小。
- ◎磁芯没有受到卷线的应力，性能稳定。





V2





H2

## Shape and dimensions (Unit:mm)

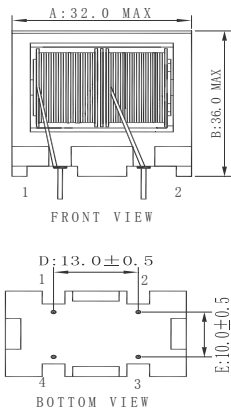

立式 (V2)

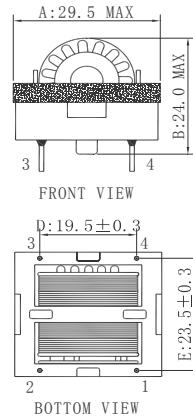

卧式 (H2)

## 标准系列特性表

PART NO.	Rated current	Inductance	DC Resistance
11-ET2828X5020-XXX	6.0A	5.0mH MIN	110m $\Omega$ (MAX)
11-ET2828X5021-XXX	6.0A	5.0mH MIN	110m $\Omega$ (MAX)
11-ET2828X9020-XXX	3.5A	9.0mH MIN	200m $\Omega$ (MAX)

## Impedance Curve

